

DESCRIPTION

Ventilation goose neck heads GR are destined for installation in forced and natural ventilation systems and venting of void spaces on seagoing ships as well as on offshore objects. Construction is based on standard DIN 82340. Housing is made of mild steel St3Sx. Swing-out nuts are made of brass. Bolts and pins are made of stainless steel, gasket – rubber profile. Surface treatment: hot dip galvanized (painted with epoxy marine paint SWA 7423-014-250 on request).


TECHNICAL SPECIFICATION & DIMENSIONS**Execution:**

Z – with weather-tight cover

N – without closing device

Dimension H must be specified by the Customer.

Dimensions [mm]					
AxB	C	D	R	S	T
100x200	595	190	162	5	9
125x250	695	240	189	5	9
200x200	595	190	162	5	9
300x300	805	290	216	6	10
400x400	1005	390	267	6	10
500x500	1215	490	321	6	10
600x600	1415	590	372	7	10

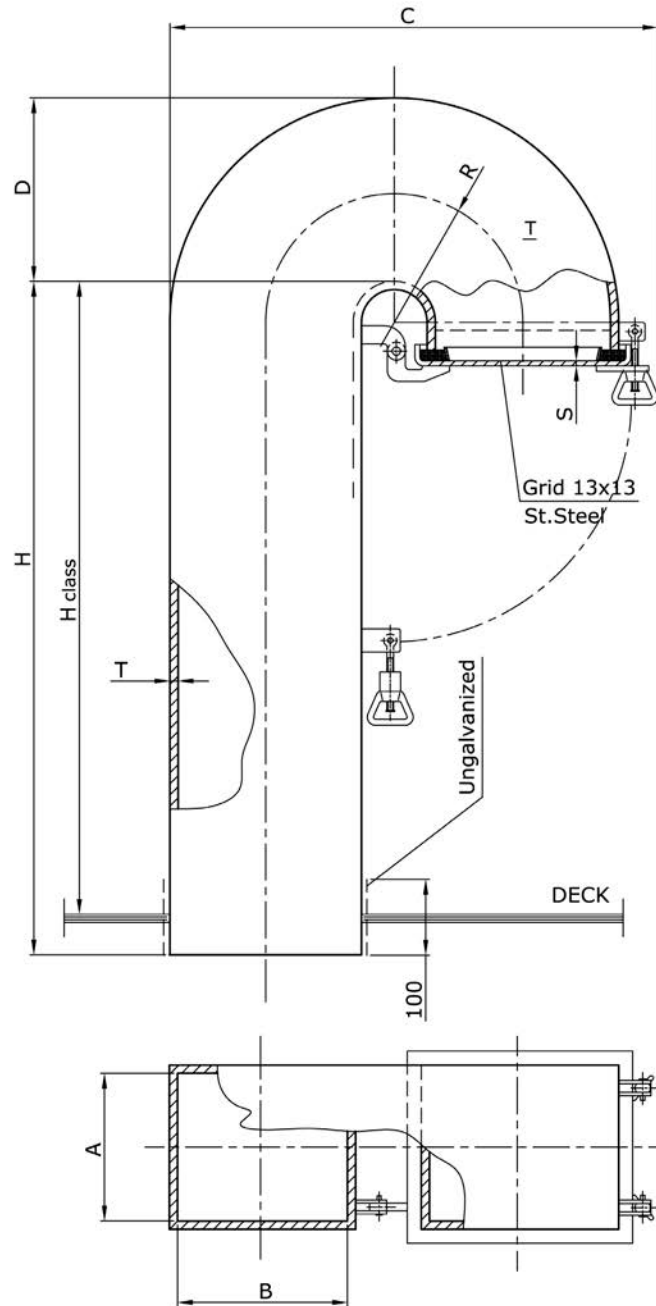

MARKING

Example: GR type head of dimensions $A \times B = 100 \times 200$ mm, of height $H = 950$ mm, with weathertight cover Z: GR 100x200-950-Z