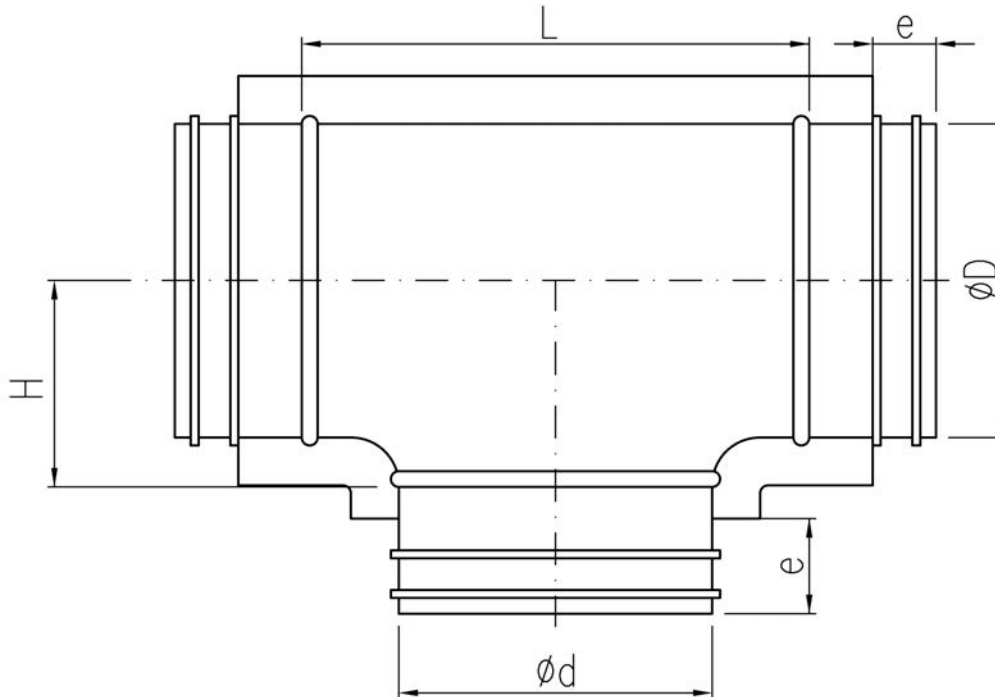


**DESCRIPTION**

TCPLI type is assembled T-pieces with pressed SPL flange and EPDM gasket. The diameter  $\varnothing D$  and  $\varnothing d$  can be different sizes. The element is insulated with mineral wool.

**DIMENSIONS**


Dimensions [mm]				Weight [kg]
$\varnothing D$	$\varnothing d$	L	H	
100	100	180	82	1.0
125	100	260	104	1.1
125	125	285	108	1.3
160	100	260	107	1.5
160	125	285	107	1.7
160	160	346	112	1.8
200	100	255	115	1.9
200	125	306	129	2.2
200	160	350	136	2.6
200	200	307	139	2.7
250	100	255	157	2.4
250	125	306	159	2.7
250	160	350	160	3.2
250	200	350	167	3.6
250	250	390	169	3.8

Diameters $\varnothing d, \varnothing D$ [mm]	Tolerance $e$ [mm]
80-224	36
250-355	55